

*a measurable difference...*



## Car Window Seal Friction Tester

---

### Model: SPM

The Coefficient of Friction tester is used for fast, accurate and reliable evaluation of the static and kinetic coefficient of friction of materials when sliding over substances under specified test conditions. Different fixtures may also be attached, allowing for the testing and comparing of a variety of shapes for slip resistance.

### Application:

- Car window seals

### Features:

- Variable speed
- Interchangeable fixture capability
- RS 232 out put

### Standards:

- AS 4288

### Options:

- Fixtures
- Soft wear result and curve outputs (real time)
- DSP printer with statistical analysis
- Chart recorder


### Connections:

- **Electrical:** 220/240 VAC @ 50 HZ or  
110 VAC @ 60 HZ

*(please specify when ordering)*

### Dimensions:

- **H:** 170mm • **W:** 760mm • **D:** 160mm
- **Weight:** 12kg

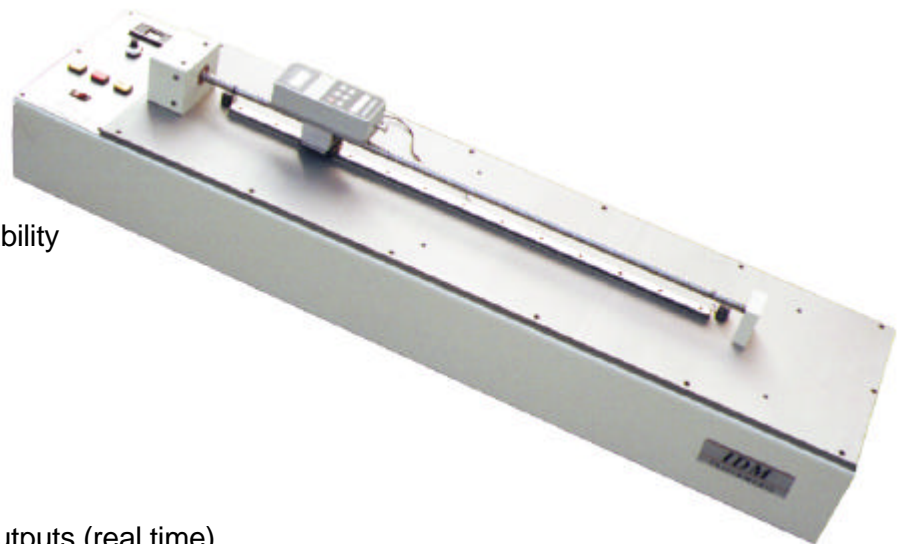

---

10-11 Colrado Court, Hallam, Victoria 3803 Australia.

Phone: +61 3 9708 6885

Fax: +61 3 9708 6770

Website: [www.idminstruments.com.au](http://www.idminstruments.com.au)

Email: [idm@idminstruments.com.au](mailto:idm@idminstruments.com.au)

All sizes and dimensions shown on this data sheet are averages only and images are as accurate as the medium allows. Products and details shown may change without notice as IDM Instruments reserves the right to make alterations to its product range from time to time.

Copyright © 2006 IDM Instruments Pty Ltd. All Rights Reserved.